


KEY FOB INSTRUCTIONS

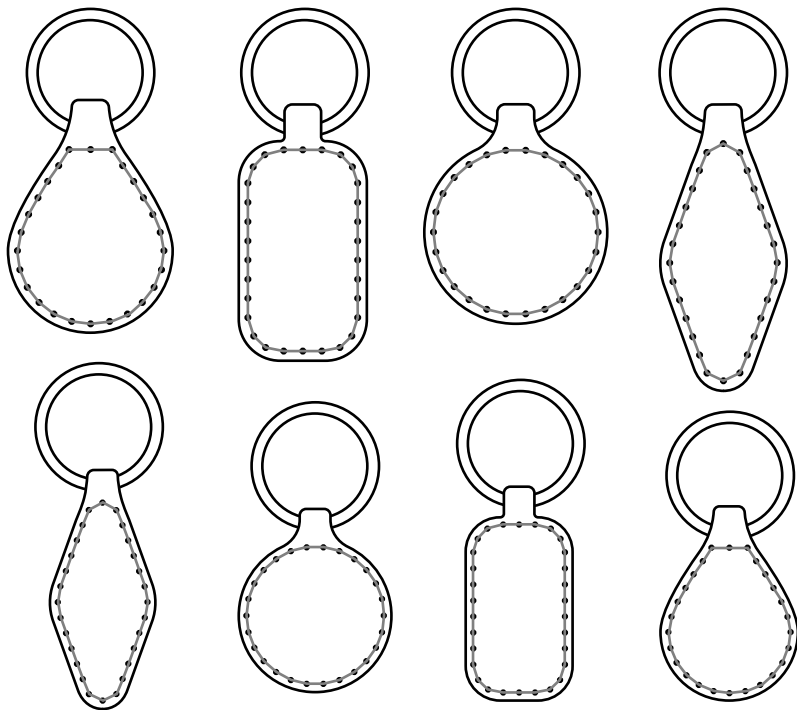


BUCKLEGUY

LEATHERCRAFT SUPPLY

SUPPLIES

- + LEATHER FOB (A SELECTION OF THE LIST BELOW)
- + O-RING (BUCKLEGUY B2020 7/8" SM OR 26MM LG)
- + NEEDLES
- + THREAD: (X1) 35"
- + CANVAS
- + SANDPAPER
- + BEESWAX

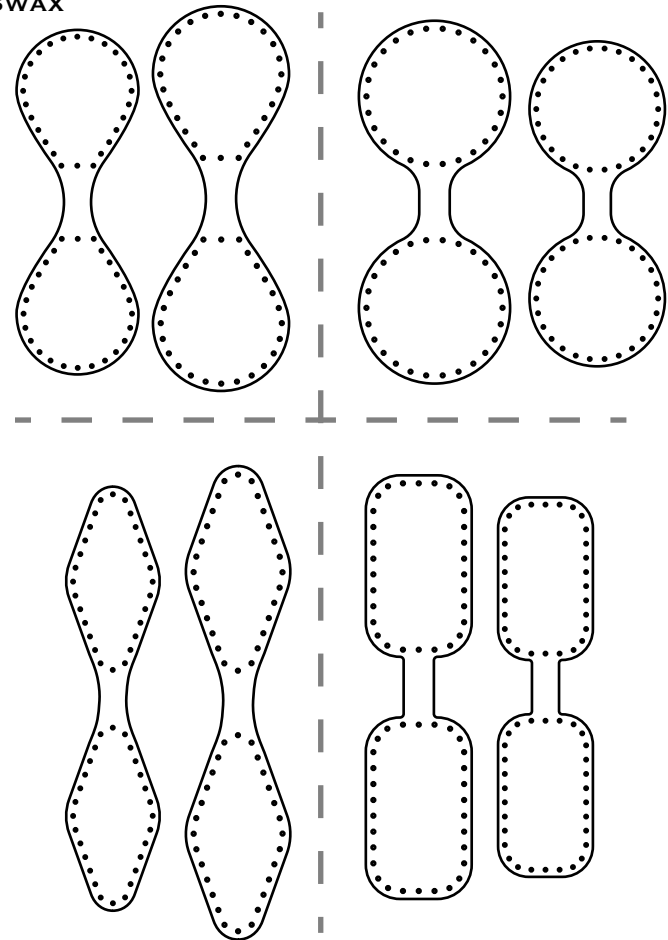




YOU SHOULD KNOW

PAPER BINDER CLIPS ARE PERFECT FOR HOLDING LAYERS OF LEATHER TOGETHER WHILE YOU STITCH. THEY SERVE THE PURPOSE OF SEWING PINS.



ALL STITCHING START POINTS ARE MARKED WITH A STAR.




FLESH VS. GRAIN COLORATION

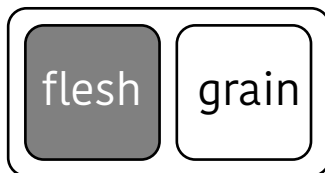


STEP 1: (Optional) Burnish just the middle of each leather fob as shown by the grey lines below.

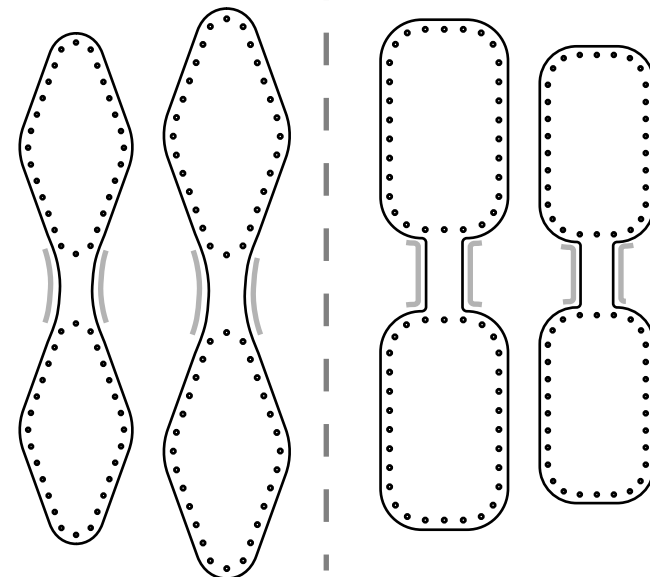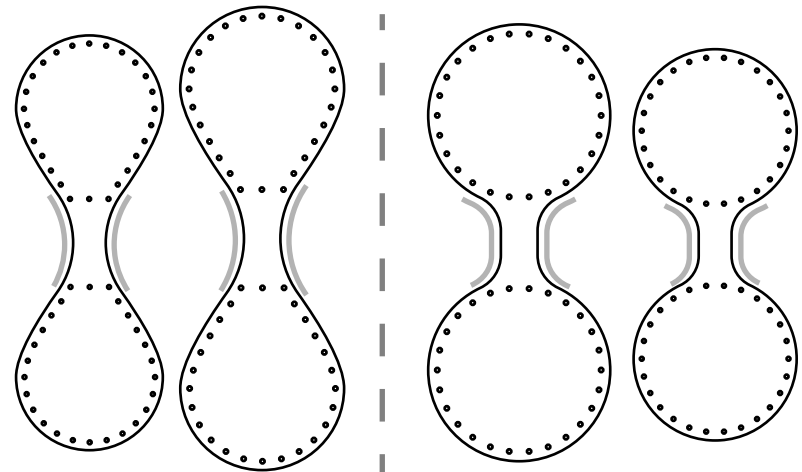

STEP 2: Place the O-ring between the two symmetrical leather pieces, and fold the leather to sandwich the O-ring. Prepare your needles. Start with your needle in the top left stitching hole. Saddle stitch to the right, all the way around the pieces until you reach your first stitch. Continue for two more stitches past your initial stitch. This will act as your back stitch. Pull both needles through to one side. Snip and carefully burn threads.

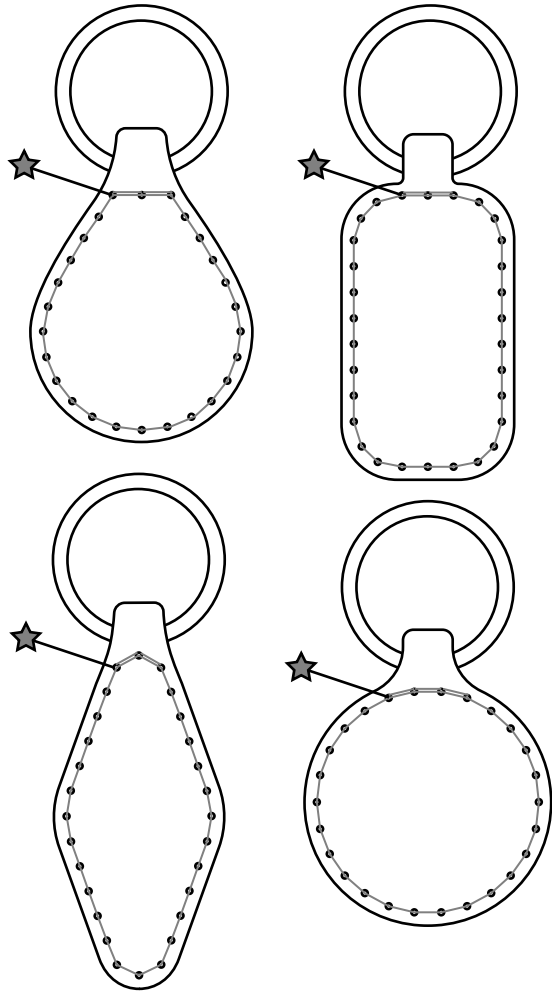

STEP 3: (Optional) Sand then burnish the outer edge around the seam as shown by the grey lines below.

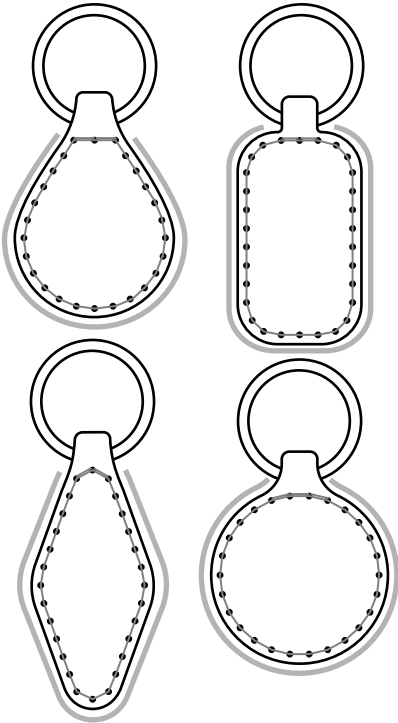

 @BUCKLEGUYCOM

THANKS FROM ALL OF US AT BUCKLEGUY!

 @BUCKLEGUY

SHARE YOUR PROJECTS WITH US ON
SOCIAL MEDIA

 @BUCKLEGUY

BY USING THE HASHTAG #BGKITS

 @BUCKLEGUY.COM